

# BRUGERVEJLEDNING

## VÆGSTIGE – MED UDGANG I TOP


varenr. 6410-300T - 6410-900T



**Materielhuset A/S**

Hastrupvej 2A DK-4622 Havdrup +45 70 222 402

info@materielhuset.dk www.materielhuset.dk

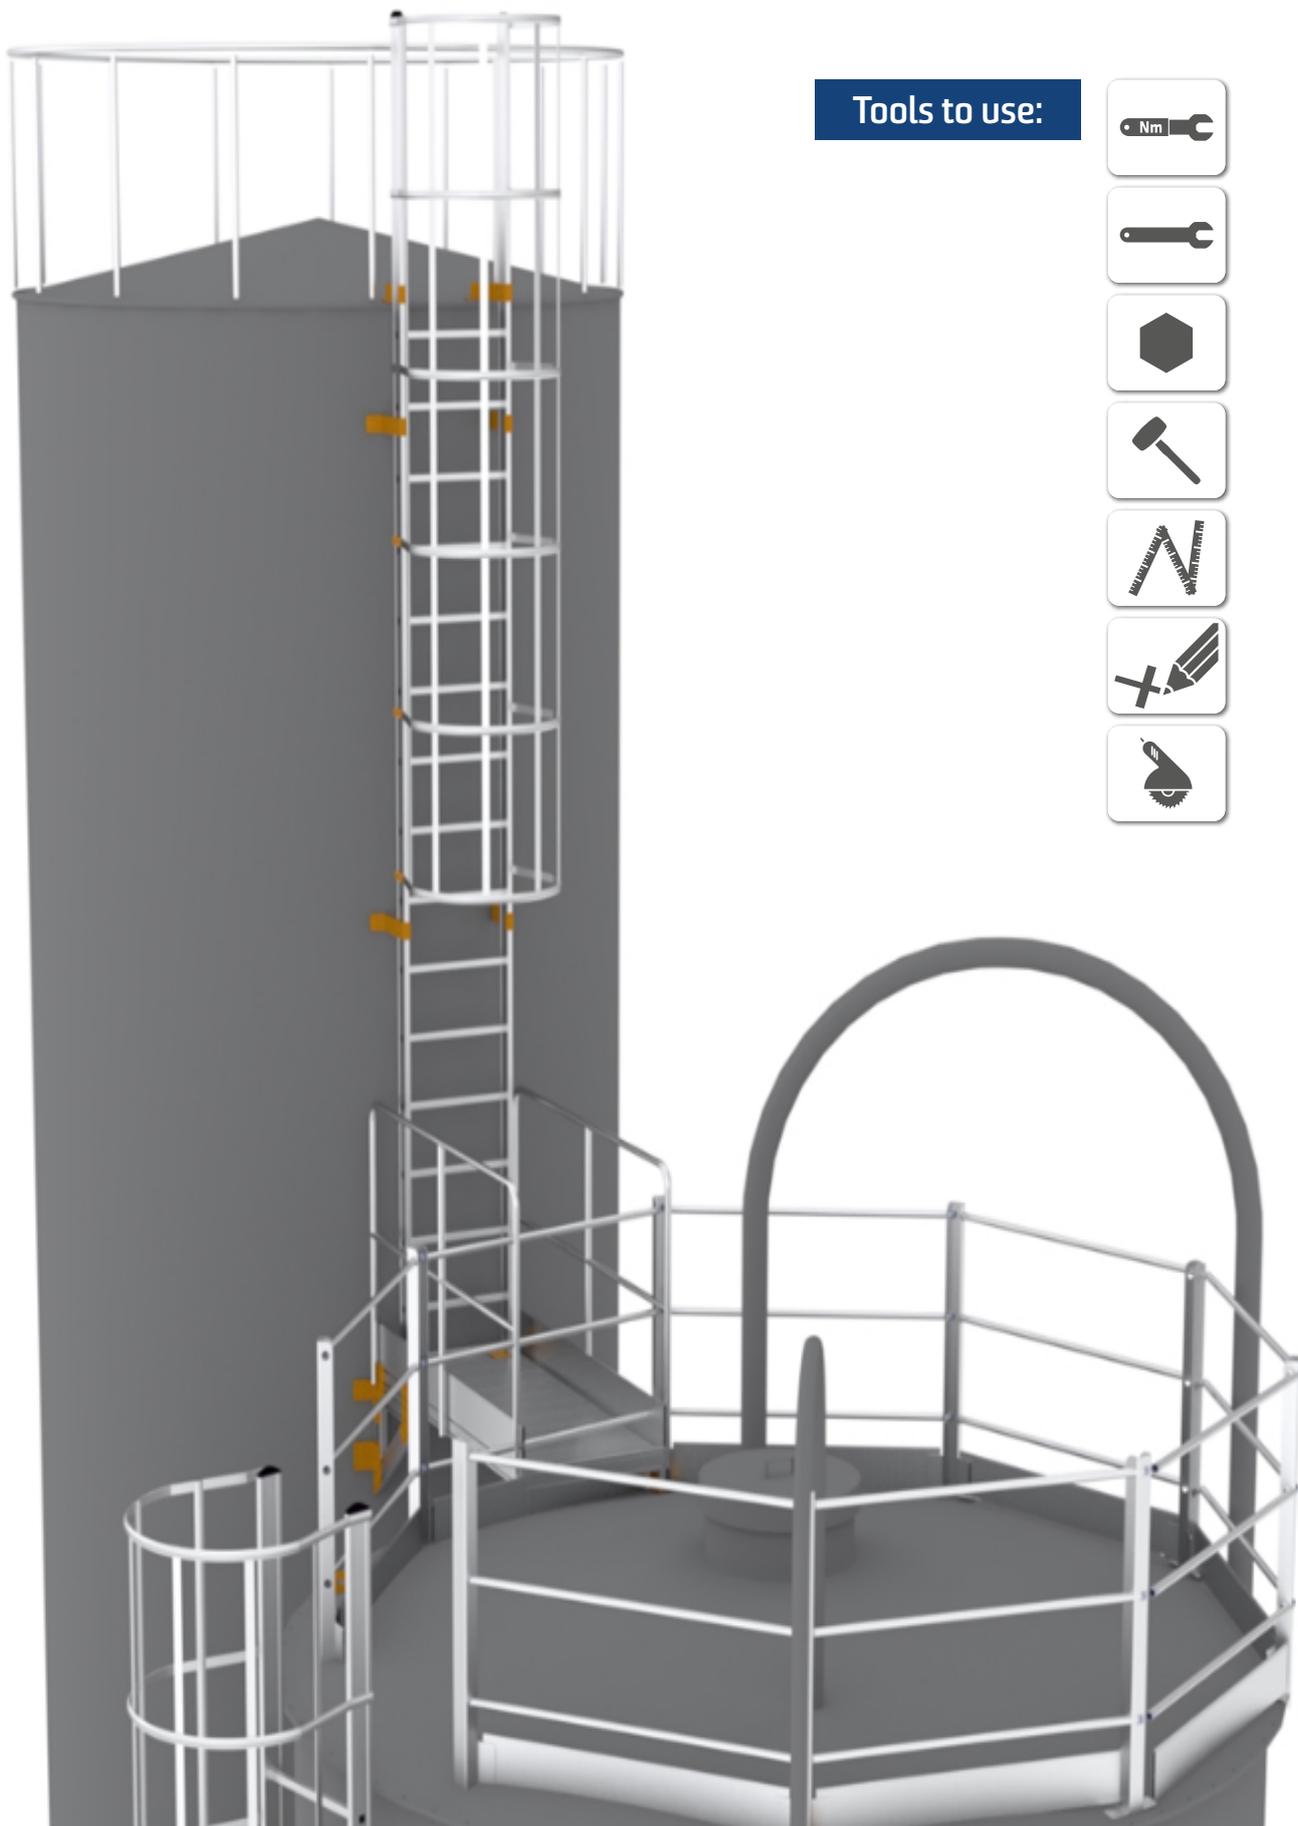

Tools to use:

- Nm
- [Wrench icon]
- [Hex nut icon]
- [Hammer icon]
- [Screwdriver icon]
- [Screwdriver icon]
- [Saw icon]



**a** 200 - 250  
mm mm

**b** 250 - 350  
mm mm


**c** 350 - 450  
mm mm





**a** 500  
mm

**b** 628  
mm

**c** max.  
2000  
mm


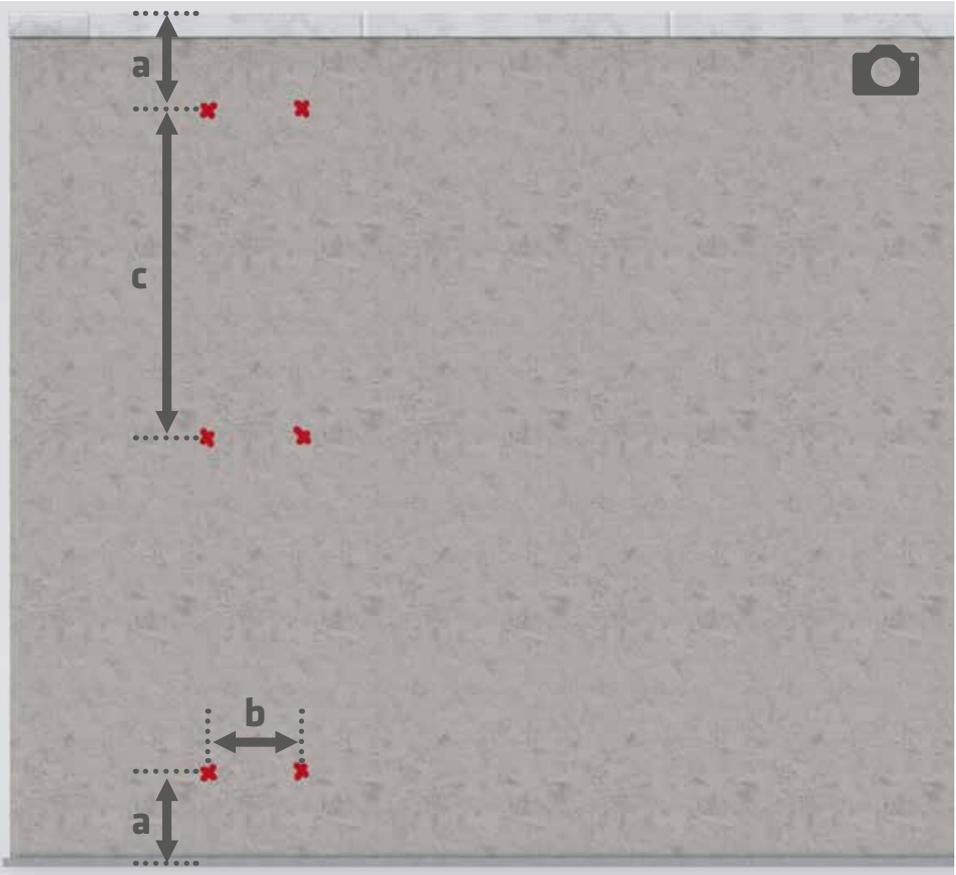


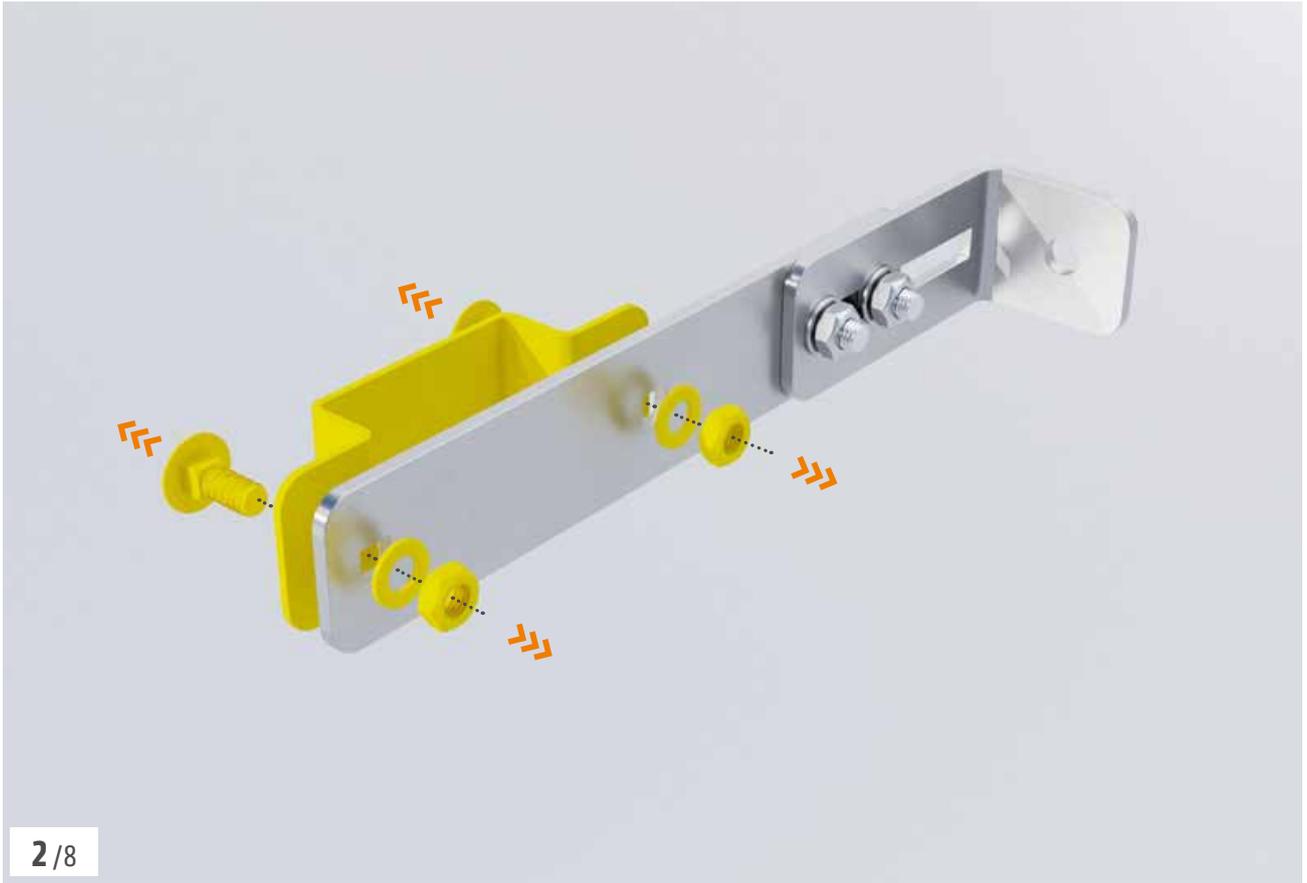

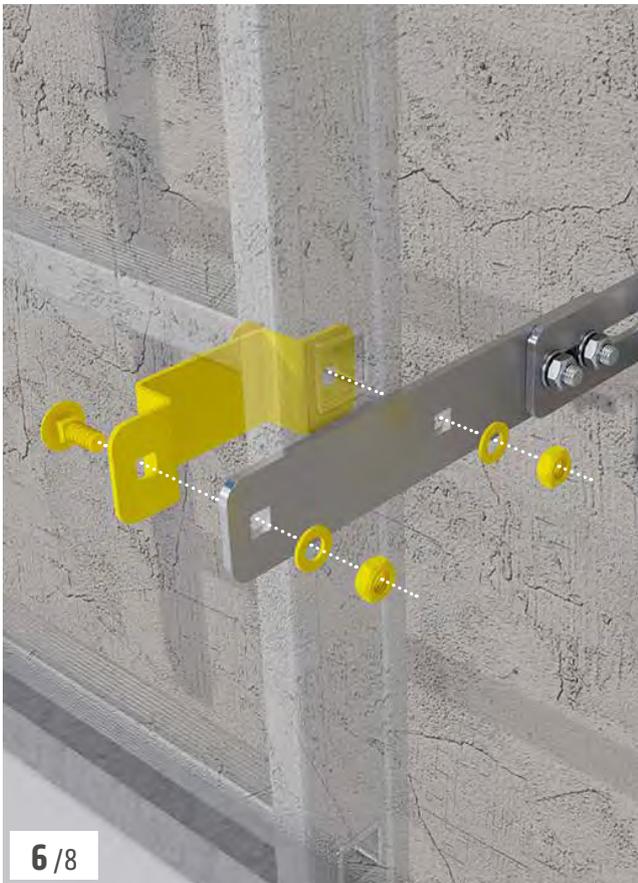




8 / 8

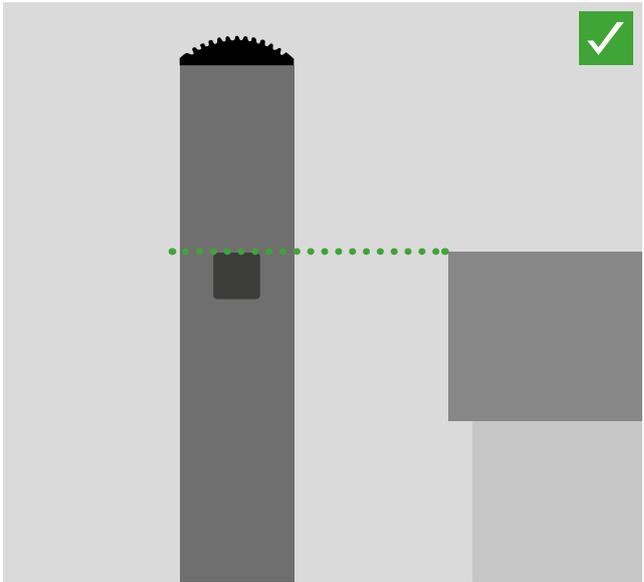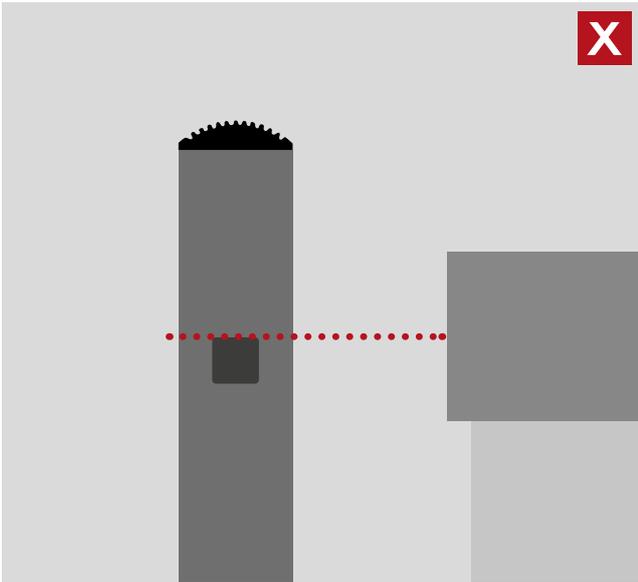







1/6



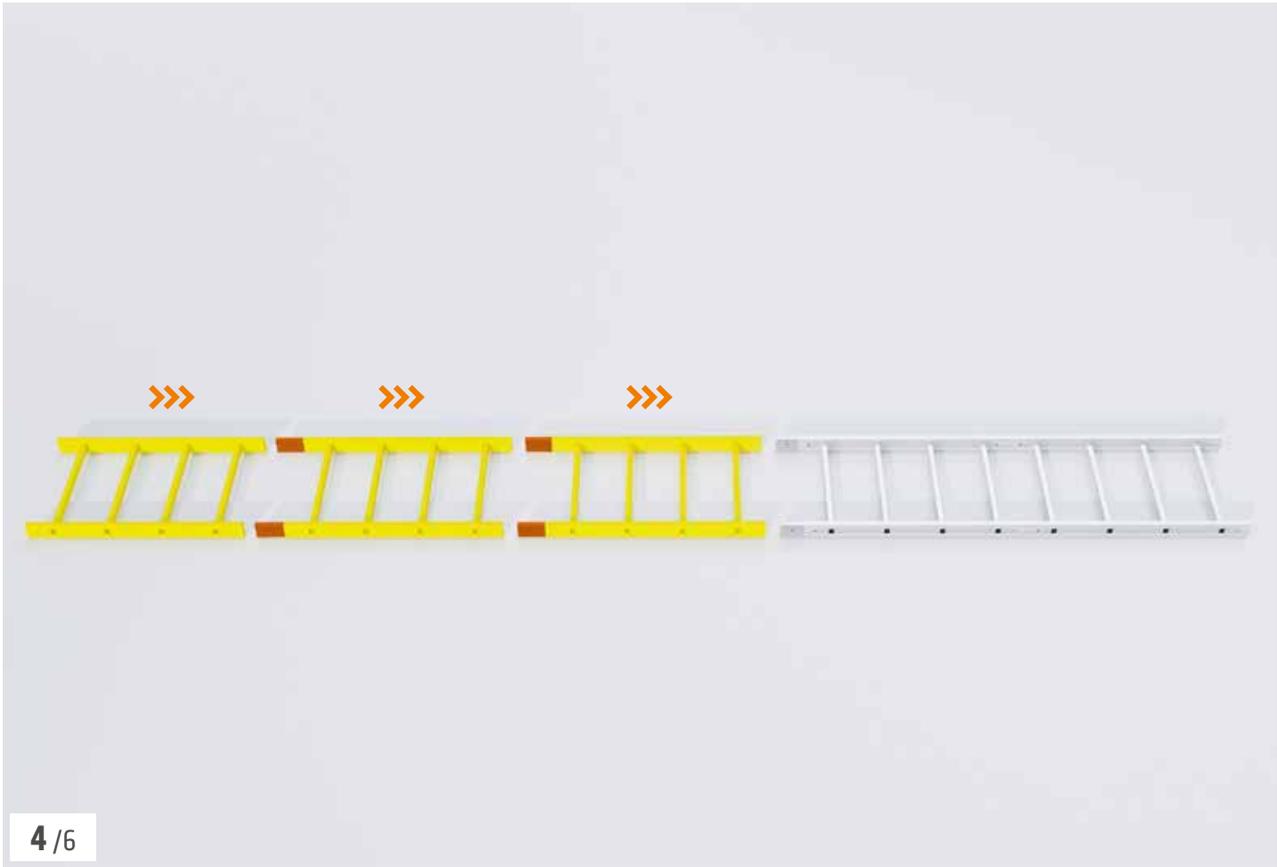

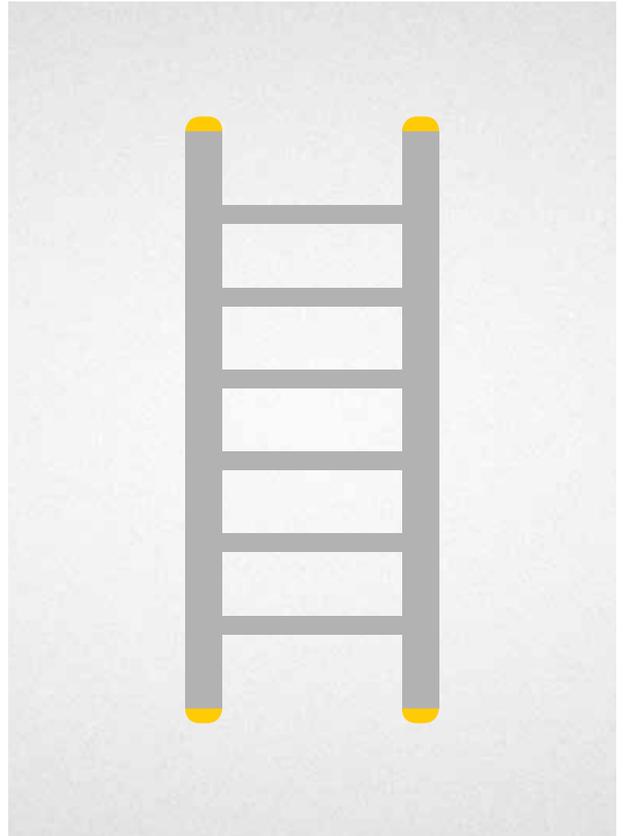

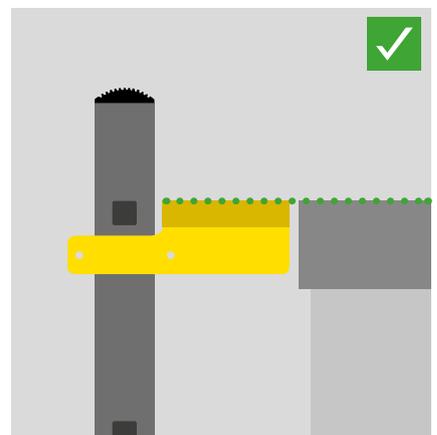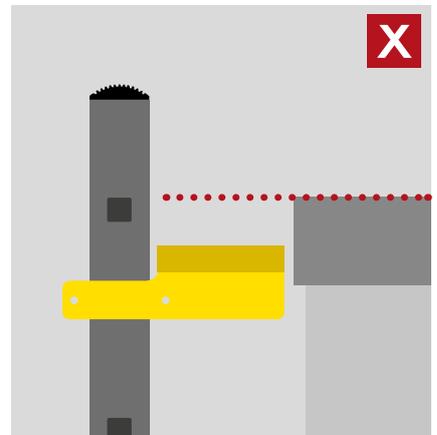


 17 | 30 Nm







P





1/6

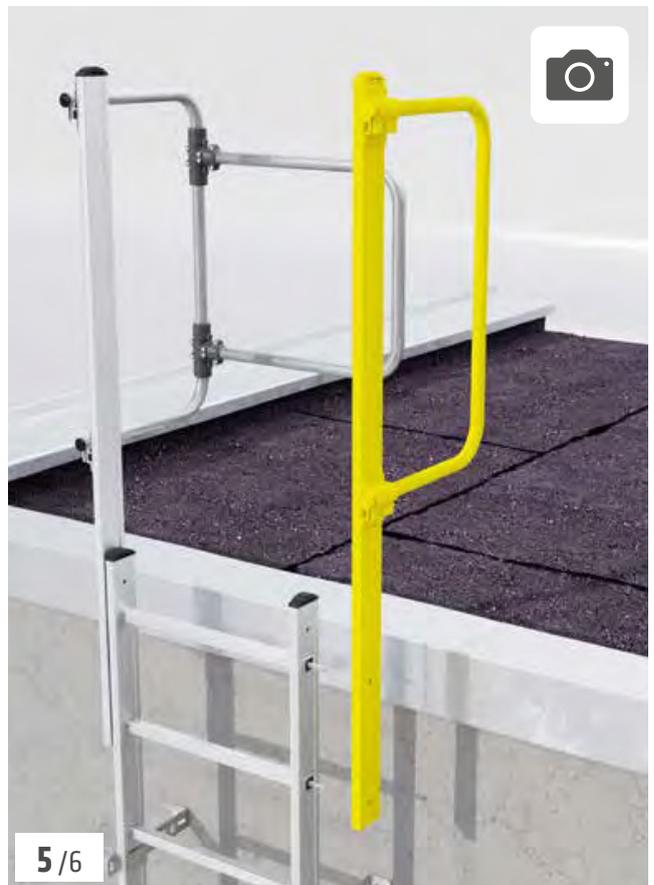

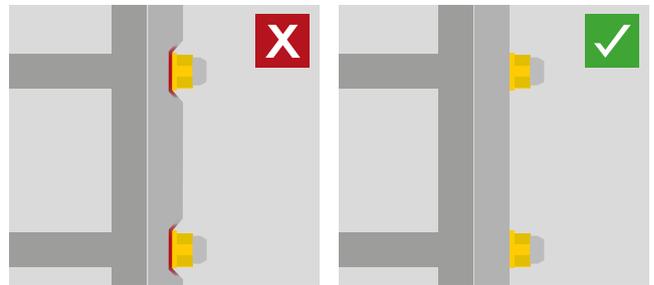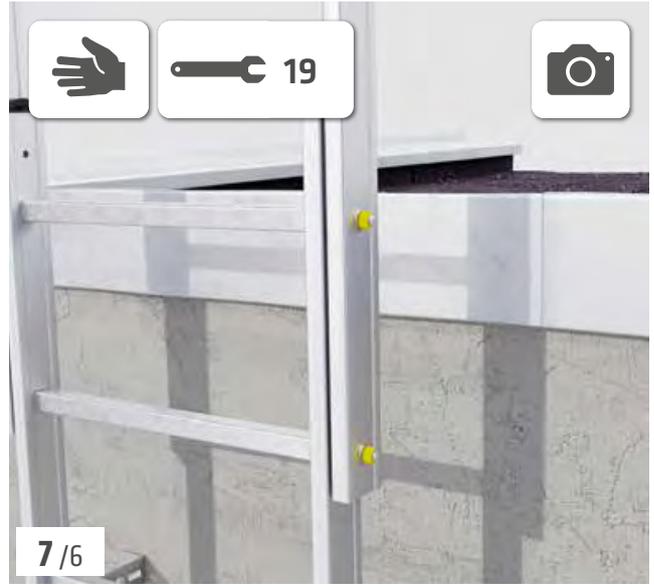

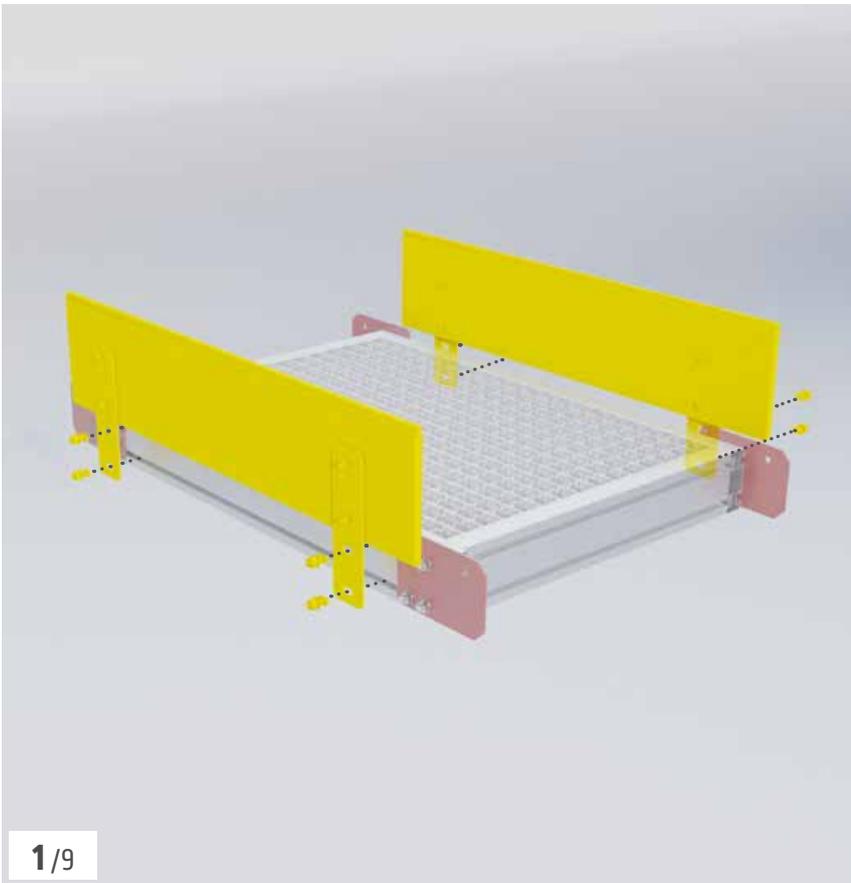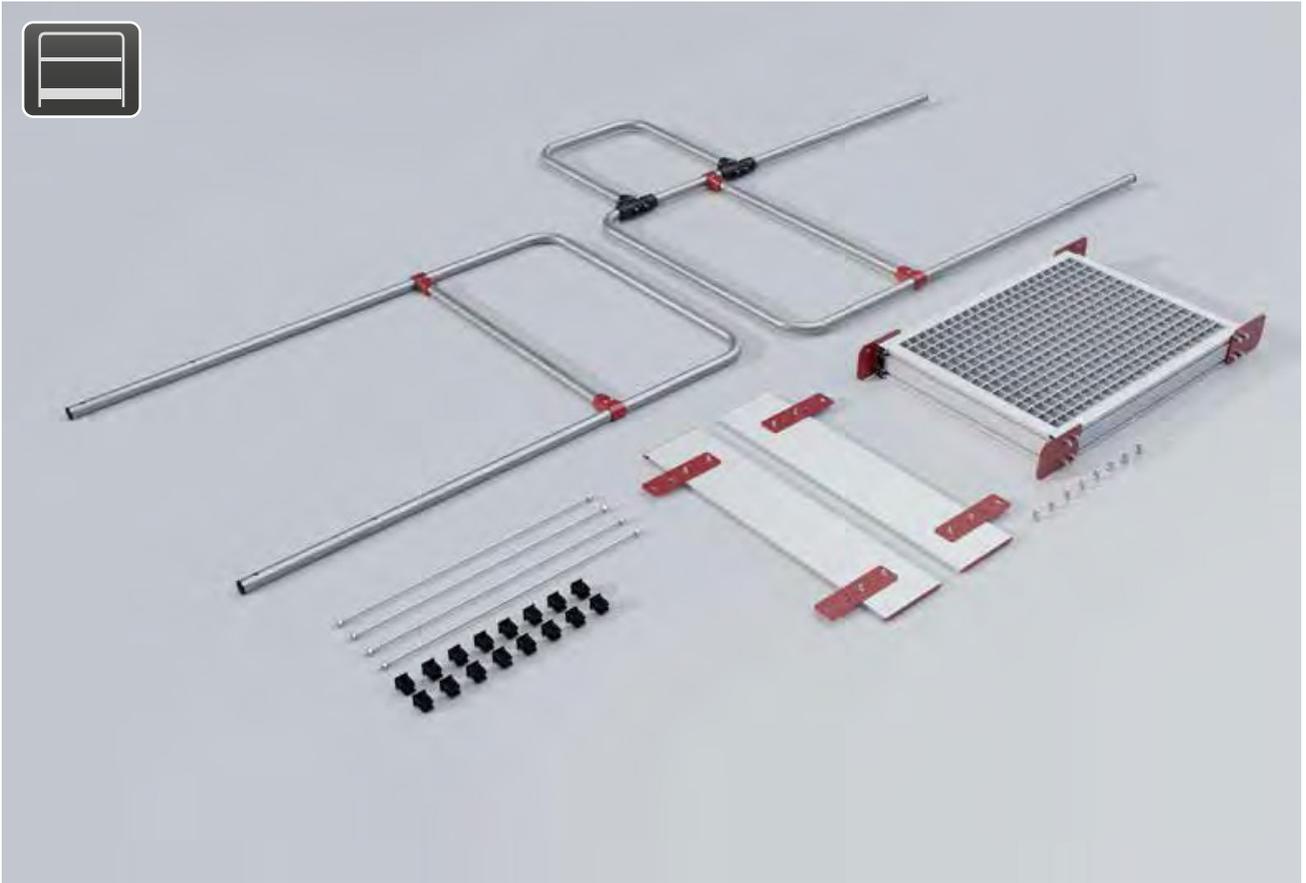


1/9

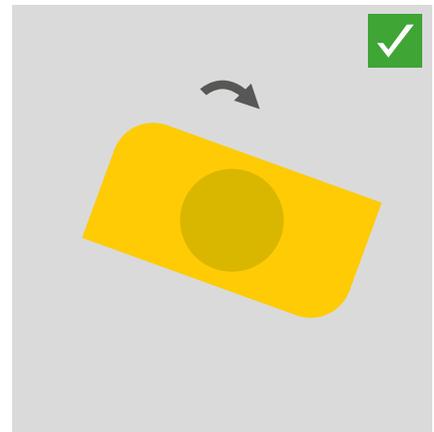
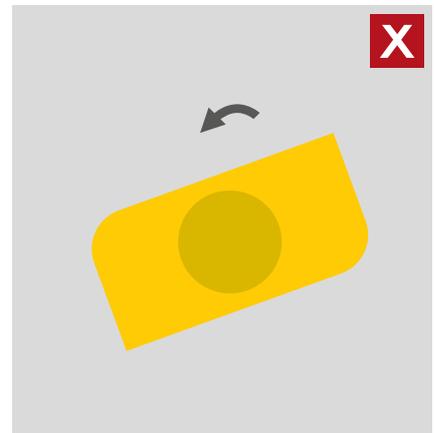


Nm 13 | 16 Nm




2/9

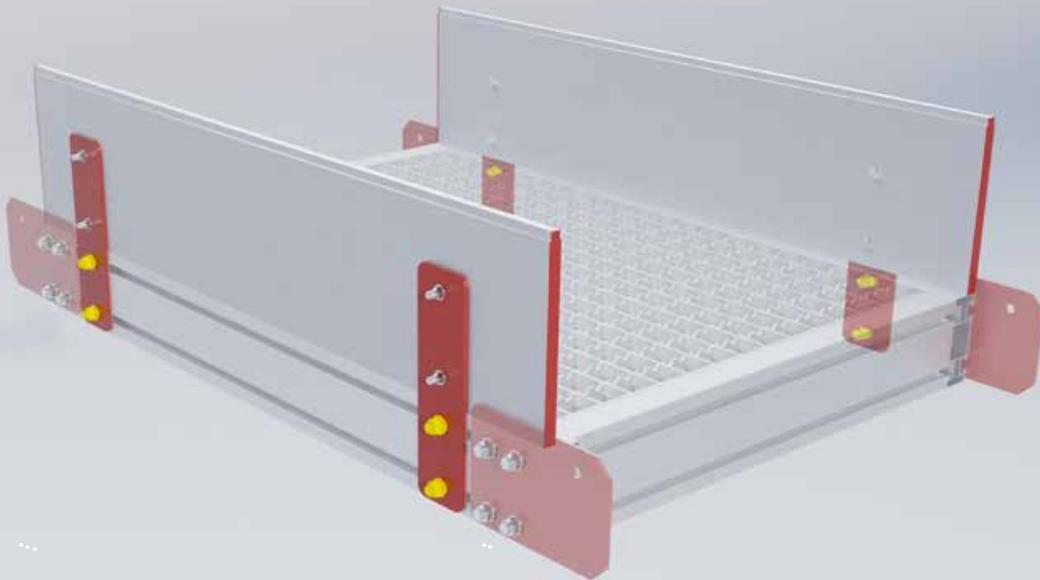

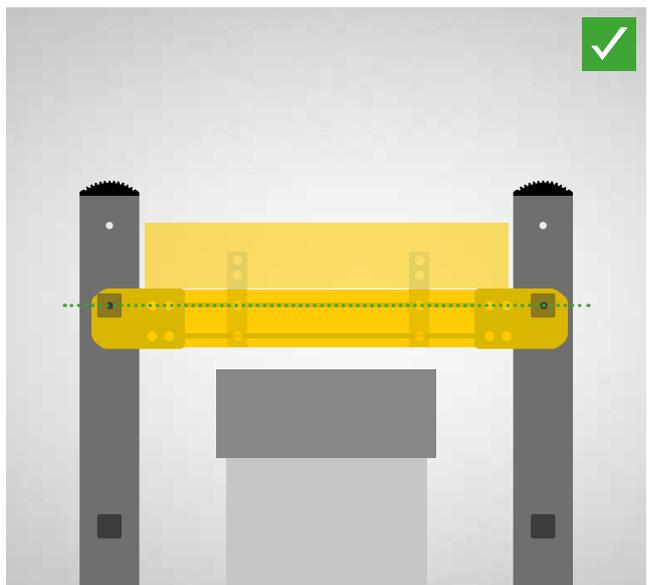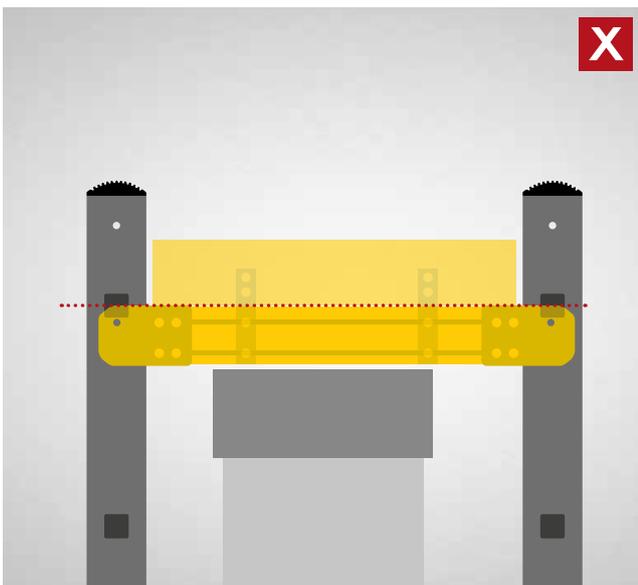



5 / 9

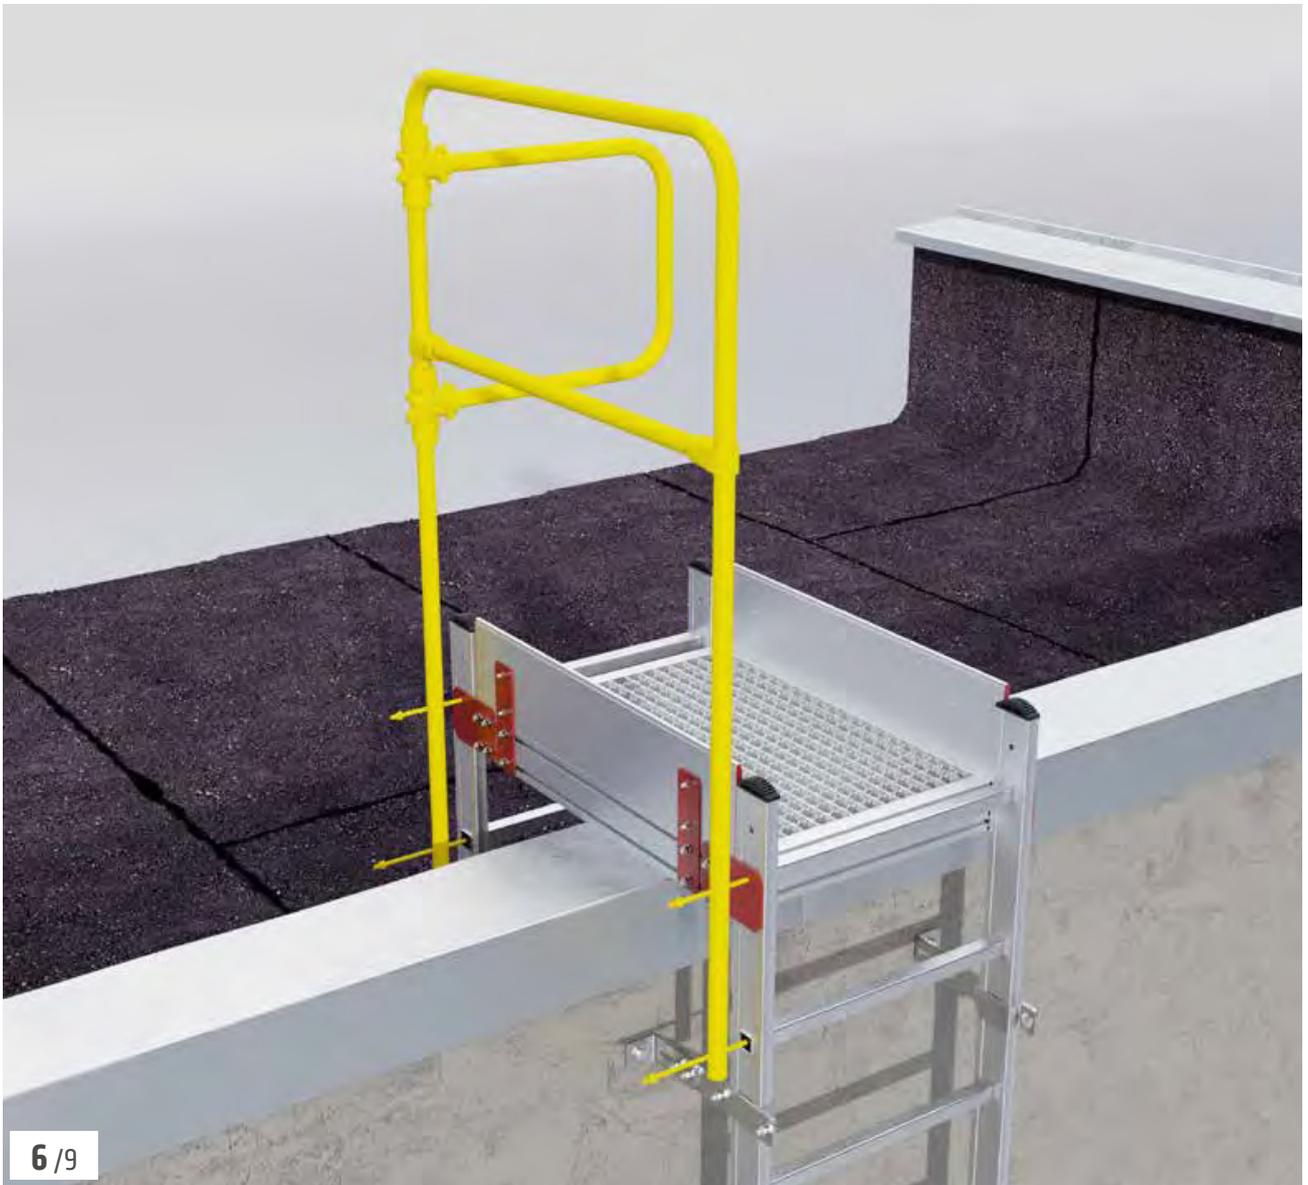

6 / 9



7/9




• Nm  13 | 16 Nm



8/9





9/9

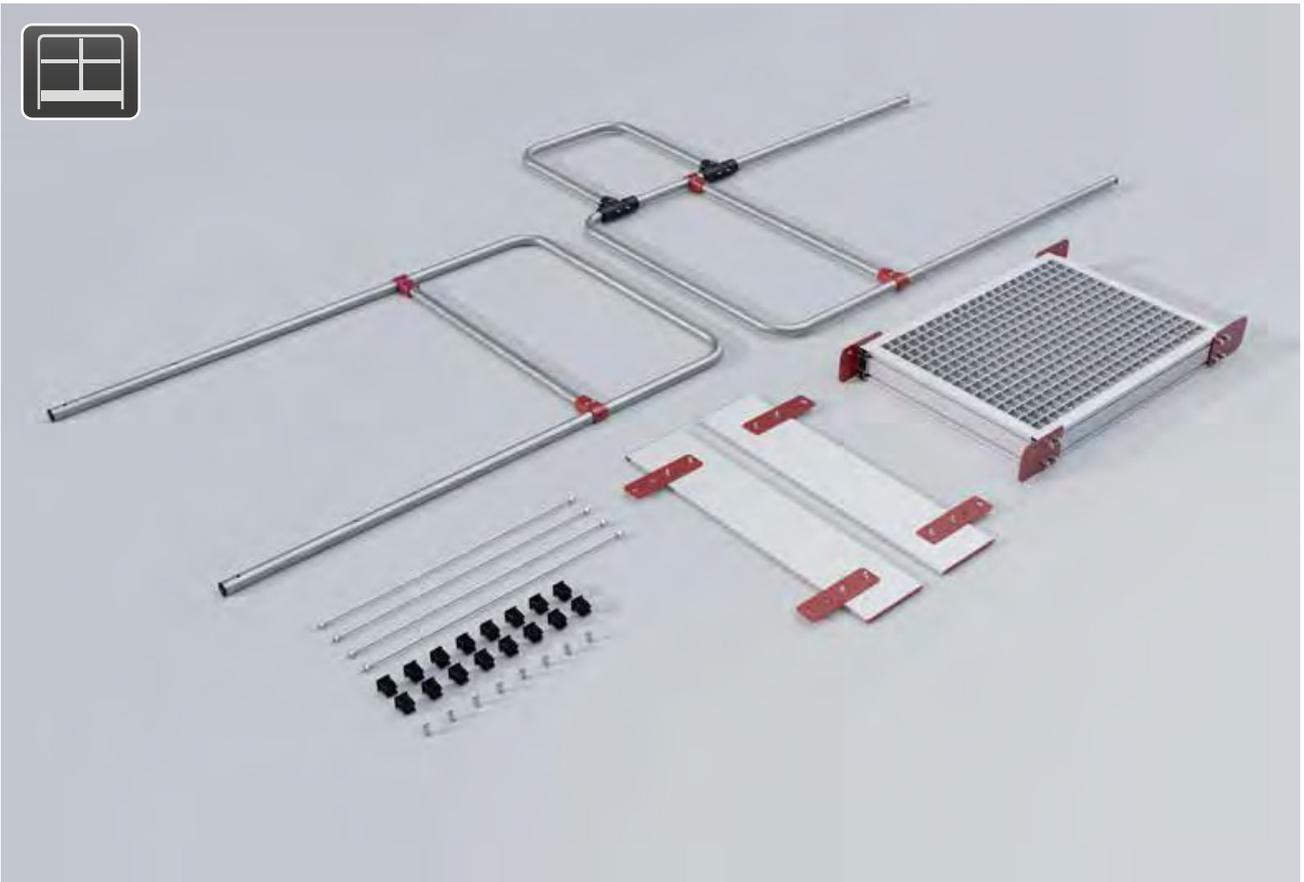

8x



1/8

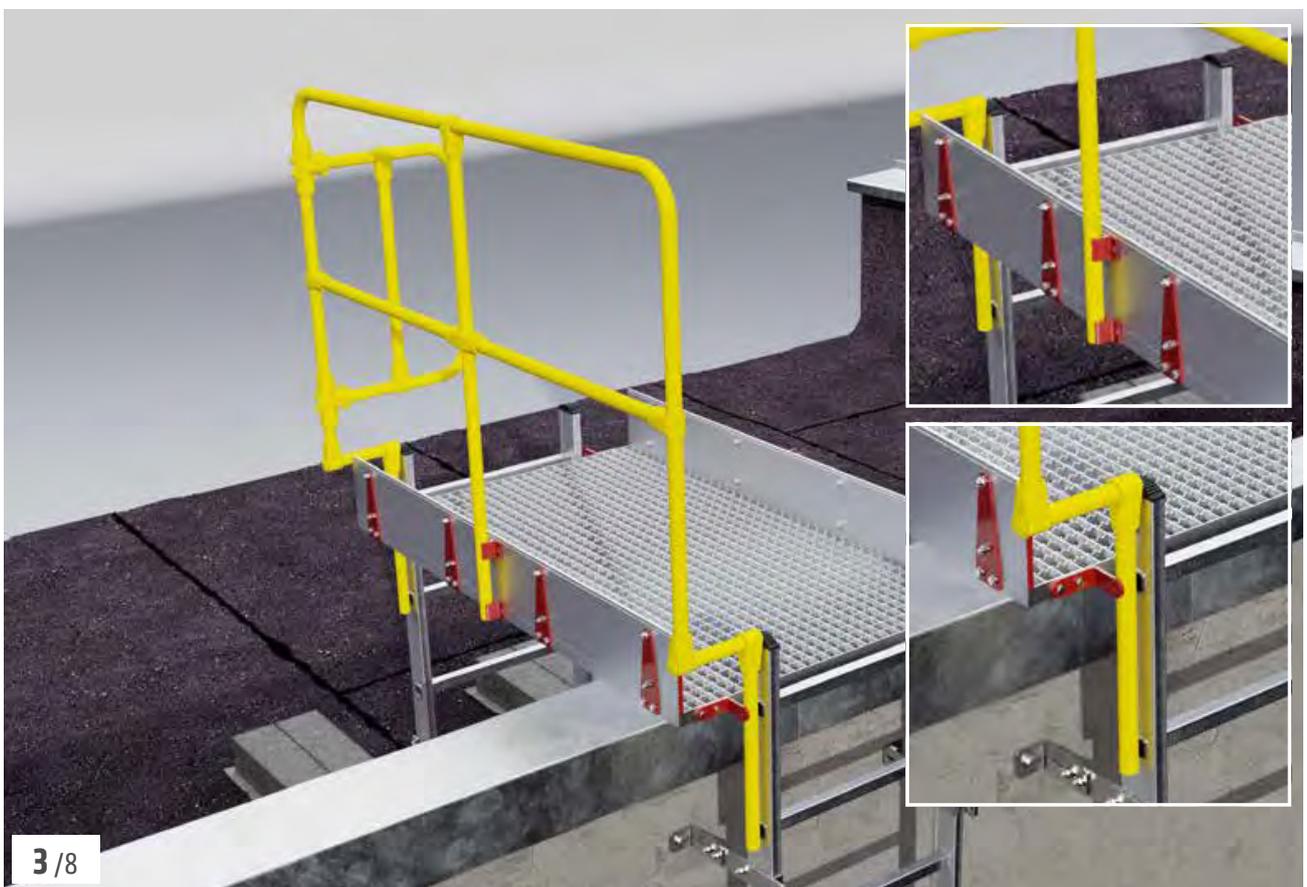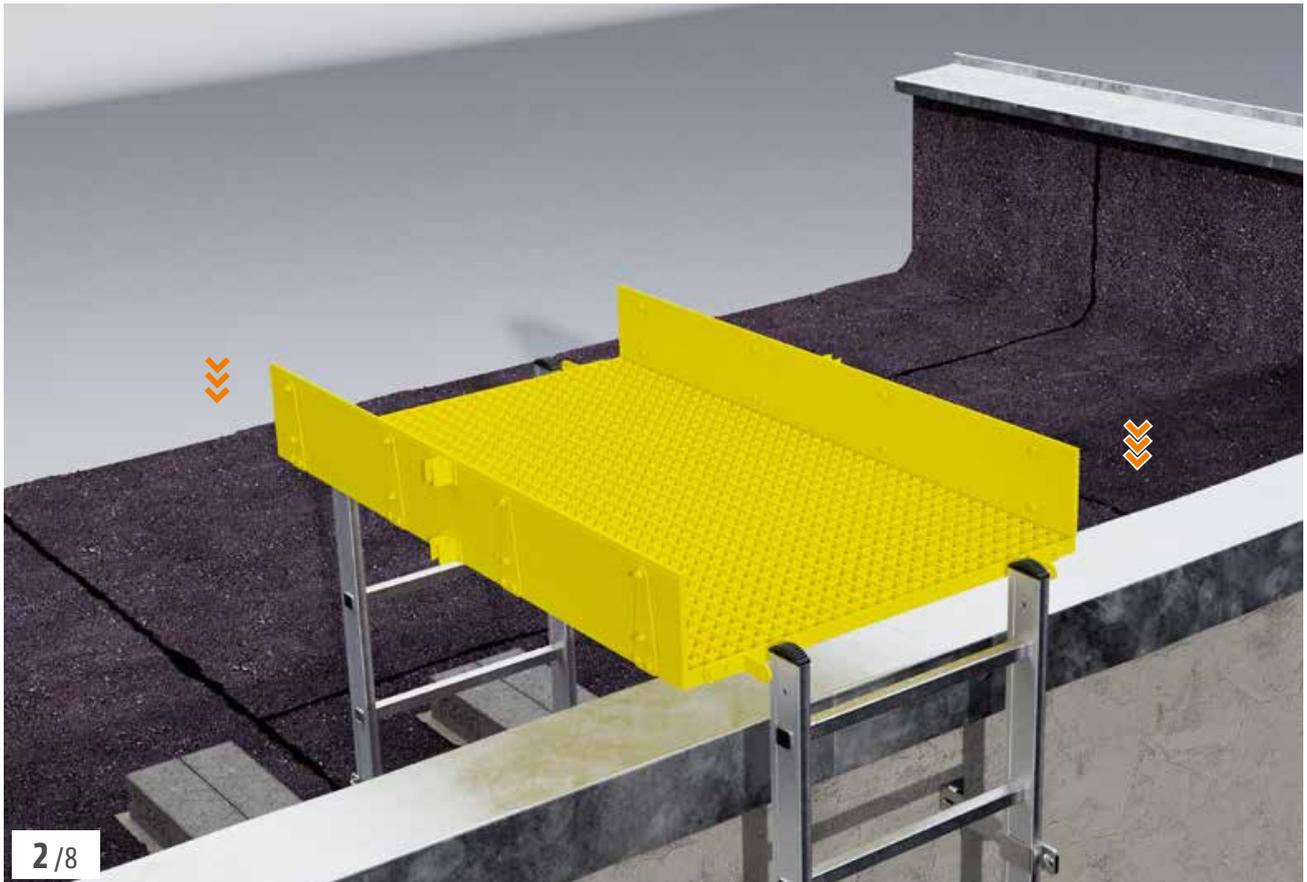




4 / 8



5 / 9




6 / 8

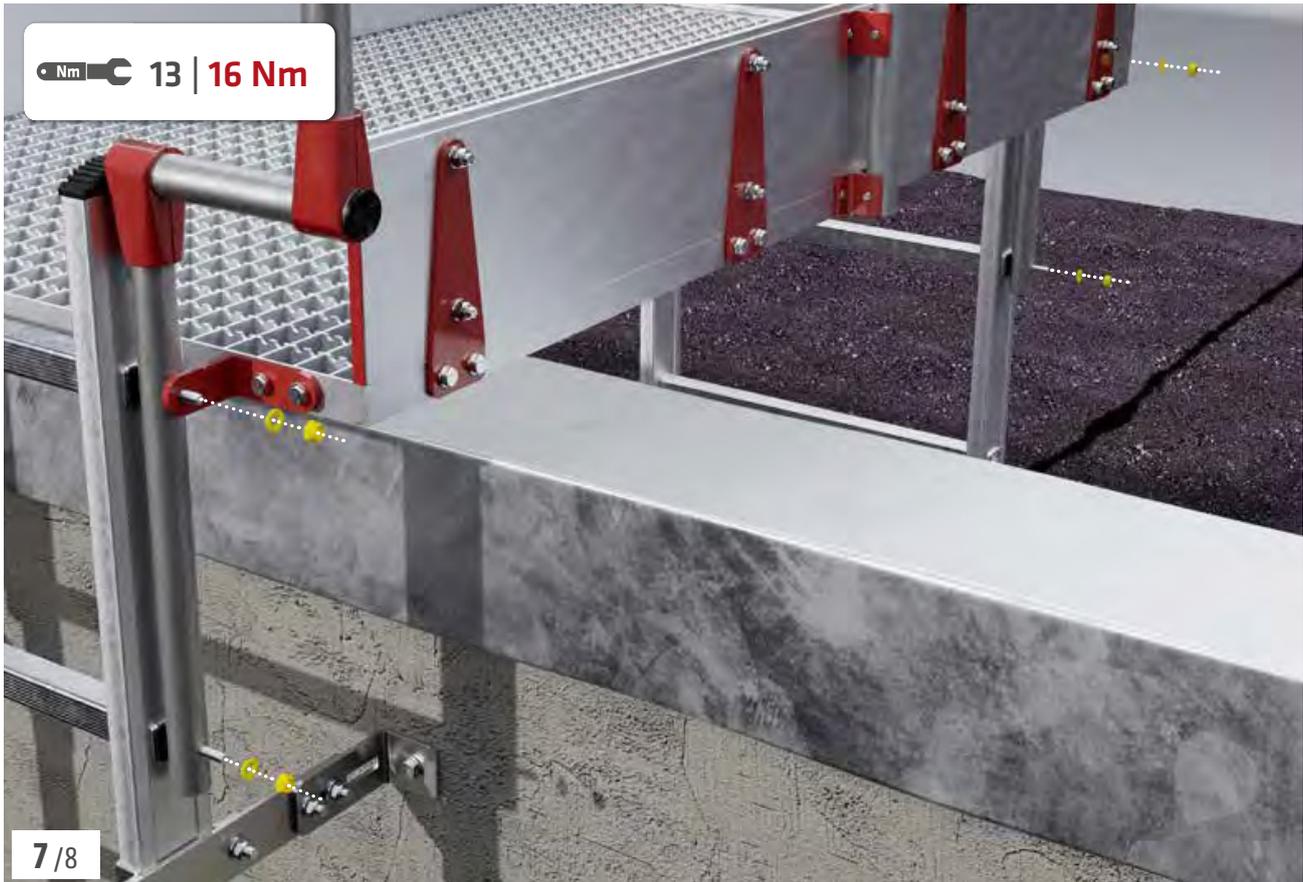



min. 2200 mm  
max. 3000 mm

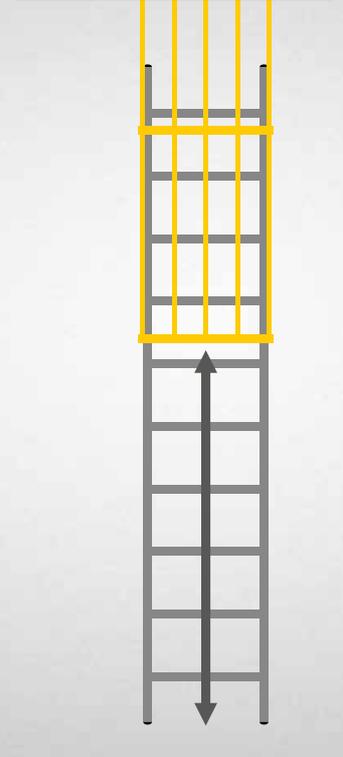


VAR. 1









VAR. 2



1/14

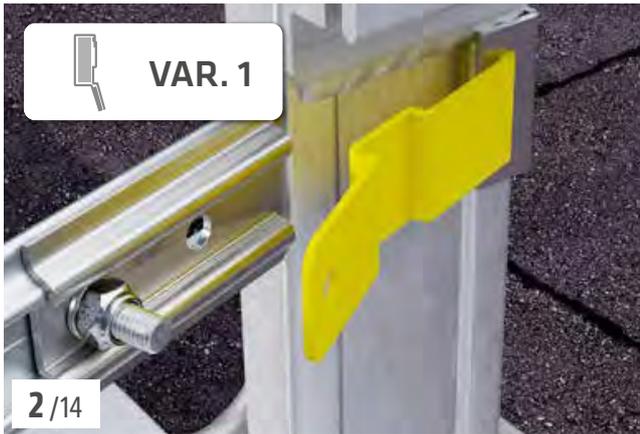

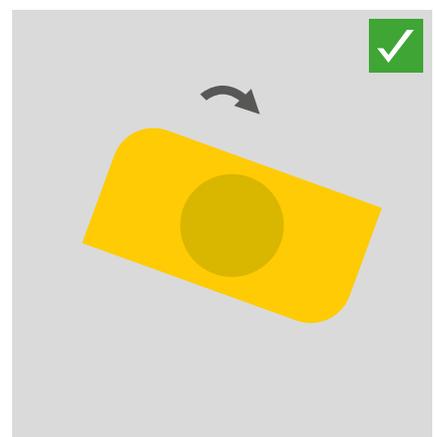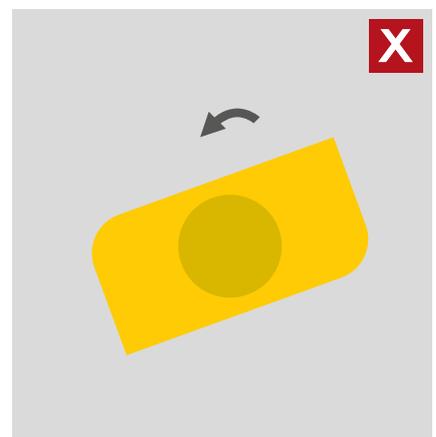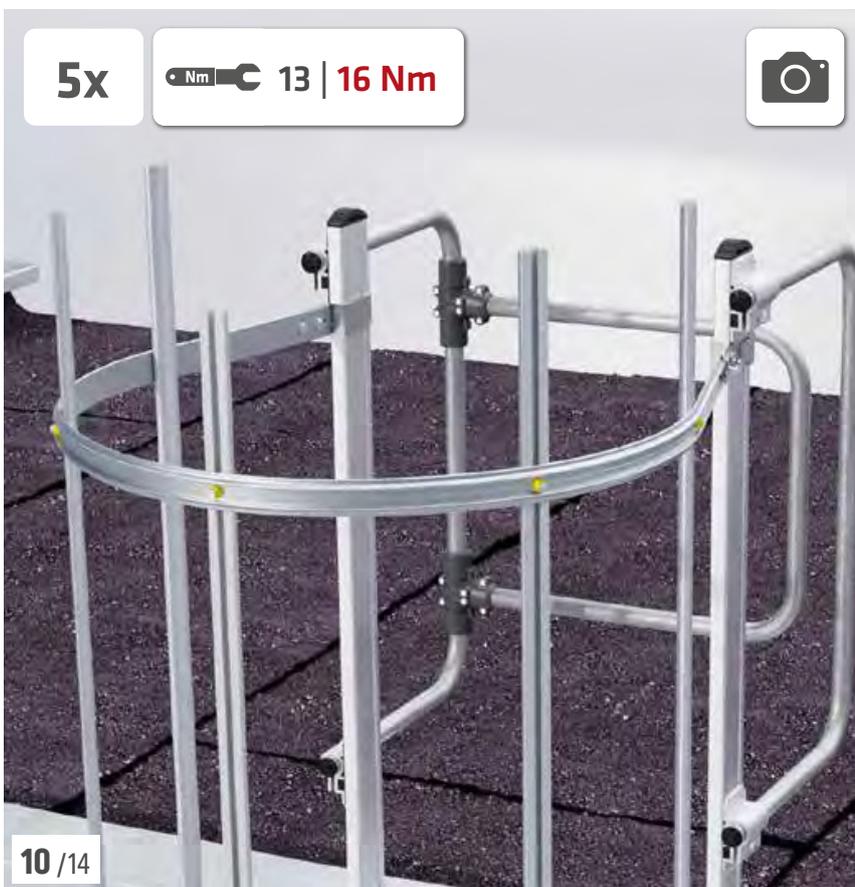

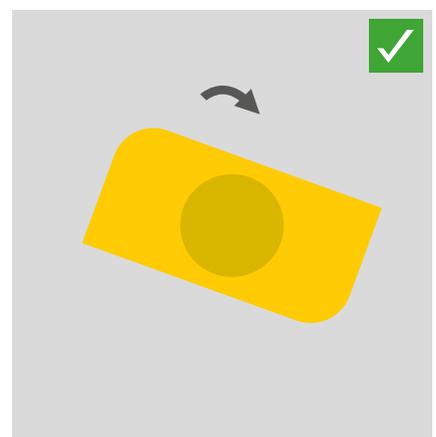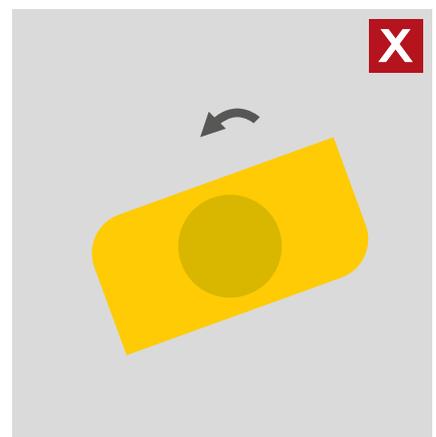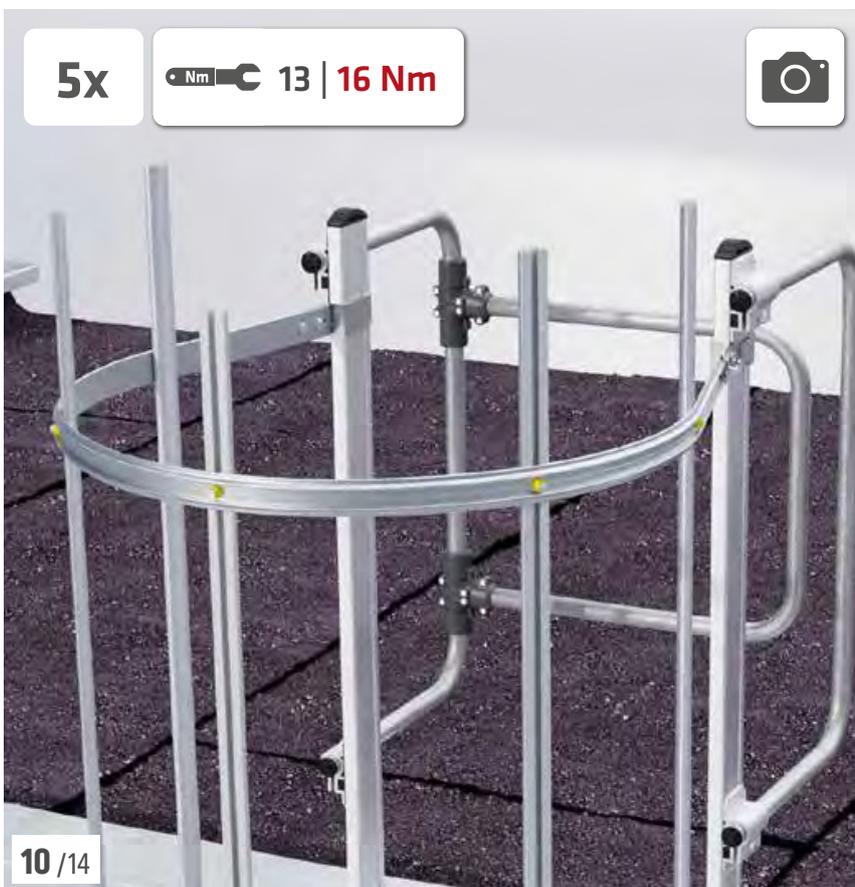



16 /14



## SAFETY GUIDELINES AND USER MANUAL

- **Condition and Access:**  
Only operate the fixed ladder system when it is in perfect technical condition.  
Ensure that unauthorized persons are kept away from the system at all times.
- **Weather and Maintenance:**  
Do not use the ladder for maintenance if weather conditions compromise safe access.
- **Clearance and Load:**  
Keep the area around the fixed ladder system clear at all times. Avoid subjecting it to shifting loads – such as rocking or jumping—that can destabilize it.
- **After-Use Procedures:**  
Always secure devices like rotating platforms, rest platforms, security doors, and safety barriers properly once you finish using them.
- **Exiting the Ladder:**  
When leaving the ladder system, maintain a firm grip on the guardrail with both hands until you reach a safe standing position.
- **Safety Barrier:**  
To gain entry/exit, swing the barrier inward toward the building using a gentle forward and upward motion.

## REST PLATFORM

- **Accessing from Above:**
  - From a secure standing position, pull up the platform using the cord
  - Descend carefully through the frame of the platform
  - Manually close the platform from a safe position once you are down
- **Accessing from Below:**
  - Fully open the platform by hand while standing safely
  - Climb up through the platform's frame
  - Close the platform from a safe standing position using the cord
  - Secure the cord to the fixed ladder to ensure you can exit safely

## BASE LADDER

- Attach the base ladder onto the fixed ladder's rungs using all four parking hooks.
- Confirm that each hook is flush against the ladder.
- Ensure that the base ladder remains stable without swaying when stepped on.
- Use the provided cable lock to secure the base ladder, thereby preventing unauthorized access or its removal from the fixed system.

## EMERGENCY EXIT LADDER

**WARNING:** Lowering the emergency exit ladder poses a serious risk of injury or death.

- Before lowering, verify that the area below the ladder is free of people and objects.
- From a secure position on the fixed ladder, press down the red trip rod with your foot.
- Only climb onto the emergency exit ladder once it has been securely positioned at the exit point.

## SECURITY DOOR FOR ESCAPE AND MAINTENANCE LADDERS

- After opening, ensure that the security door is secured to prevent it from closing by accident.
- For maintenance ladders, once you have finished using the fixed ladder system, lock the security door to prevent unauthorized access.

## SECURITY DOOR WITH FIXED SIDE PARTS

WARNING: There is a risk of injury from obstacles in the door's swing range.

- Before operating the door, make sure no persons or objects are in its pivoting path.
- Use the handbolt to open the internal access protection.
- Once you have exited, close the security door immediately.

## GENERAL PLATFORM GUIDELINES

- When moving from the platform to the fixed ladder, do not leave the platform until you have secured both hands on the ladder.
- Avoid climbing from the fixed ladder onto the platform until you are level with the platform.

## SWING-OUT ACCESS PROTECTION

WARNING: There is a risk of injury if the rotating platform swings out unexpectedly.

- Ensure that no persons or objects are in or beneath the swing path before triggering the platform.
- Release the locking mechanism from a secure position on the fixed ladder so that the platform swings open automatically.
- Once open, secure the platform to prevent it from closing unintentionally.

## INSPECTION AND MAINTENANCE

### Inspection

- Have a qualified technical expert inspect the fixed ladders for safe operation at intervals that suit the operating conditions – at least once a year. The expert must be authorized by the operator and have attended the legally

### Care

- Check movable components (such as the hinges of the rest platform, safety barriers, the emergency exit ladder trigger, and the hinges of the security door) at least once a year to ensure they operate smoothly.
- Remove any oil or contaminants from the system immediately.
- Clean the fixed ladder system with mild cleaning agents only; avoid using acids or alkaline cleaners.
- Apply proper anti-corrosion protection to cover any surface damage.
- Remove any protruding plant parts that might interfere with the system.

### Repairs

Don't attempt to repair any part of the system yourself. Any damaged components must be replaced with new ones.

### Spare parts

Always use original spare parts from your supplier.

